



POLİTEKNİK DERGİSİ

JOURNAL of POLYTECHNIC

ISSN: 1302-0900 (PRINT), ISSN: 2147-9429 (ONLINE)

URL: <http://dergipark.org.tr/politeknik>



Satellite carrier structure analysis and aerodynamic properties for low altitude distribution system

Alçak irtifa dağıtım sistemi için uydu taşıyıcı yapısı analizi ve aerodinamik özellikleri

Yazar(lar) (Author(s)): Hasan KÖTEN¹, Tarık TUFAN², Enes DEMİR³

ORCID¹: 0000-0002-1907-9420

ORCID²: 0000-0001-9324-2401

ORCID³: 0009-0000-6695-2897

To cite to this article: Köten H., Tufan T. ve Demir E., “Satellite carrier structure analysis and aerodynamic properties for low altitude distribution system”, *Journal of Polytechnic*, 28(1): 325-329, (2025).

Bu makaleye şu şekilde atıfta bulunabilirsiniz: Köten H., Tufan T. ve Demir E., “Satellite carrier structure analysis and aerodynamic properties for low altitude distribution system”, *Politeknik Dergisi*, 28(1): 325-329, (2025).

Erişim linki (To link to this article): <http://dergipark.org.tr/politeknik/archive>

DOI: 10.2339/politeknik.810993

Satellite Carrier Structure Analysis and Aerodynamic Properties for Low Altitude Distribution System

Highlights

- ❖ Aerodynamics
- ❖ Rocket study
- ❖ CFD
- ❖ HAD

Graphical Abstract

This study investigates analysis of low altitude satellite carrier system structure and aerodynamic characteristic properties to find the optimum parameters of low altitude delivery system. Computational Fluid Dynamics (CFD) tools are used to solve the governing equations of the system and to illustrate the airflow around the carrier system.

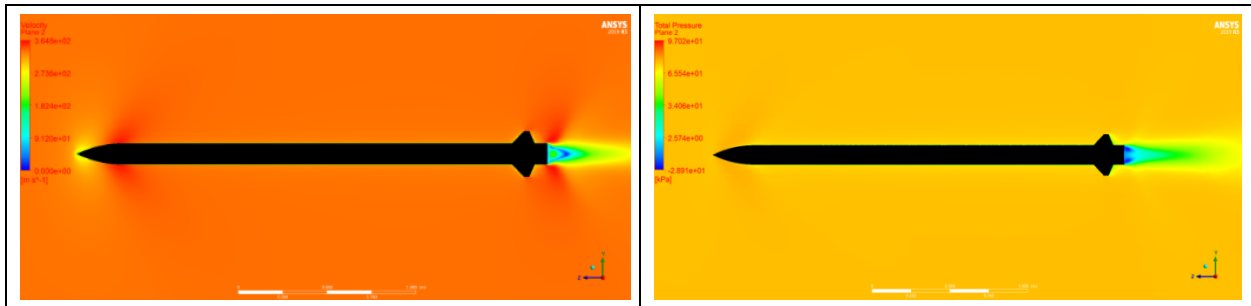


Figure. Difference for match 1 with optimum drag coefficient enhancement

Aim

Calculating the optimum parameters of low altitude delivery system

Design & Methodology

Computational Fluid Dynamics (CFD) tools are used to solve the governing equations of the system and to illustrate the airflow around the carrier system.

Originality

Obtaining the drag force and the drag coefficient in the velocity range of 0.6 and 4

Findings

The drag coefficient of the carrier system is 0.342 at $M = 0.6$ and 7.65 at $M = 4$ as maximum and minimum value

Conclusion

Satellite carrier system actual flight trajectory is widely and qualitatively agreement with the similar experimental and numerical studies in the literature.

Declaration of Ethical Standards

The author(s) of this article declare that the materials and methods used in this study do not require ethical committee permission and/or legal-special permission.

Satellite Carrier Structure Analysis and Aerodynamic Properties For Low Altitude Distribution System

(Bu çalışma ECRES 2020 konferansında sunulmuştur. / This study was presented at ECRES 2020 conference.)

Araştırma Makalesi / Research Article

Hasan KÖTEN^{1*}, Tarık TUFAN¹, Enes DEMİR²

¹Istanbul Medeniyet University, Istanbul, Türkiye

²Marmara University, Istanbul, Türkiye

(Geliş/Received : 15.10.2020 ; Kabul/Accepted : 15.07.2021 ; Erken Görünüm/Early View : 01.04.2024)

ABSTRACT

This study investigates analysis of low altitude satellite carrier system structure and aerodynamic characteristic properties to find the optimum parameters of low altitude delivery system. Computational Fluid Dynamics (CFD) tools are used to solve the governing equations of the system and to illustrate the airflow around the carrier system. Computer Aided Design (CAD) structure of the satellite carrier system is generated using Space-Claim and exported to ANSYS solver. Commercial CFD software, ANSYS Fluent code is used to compute airflow velocities, pressure, the drag force and the drag coefficient and reported. In this study, the main goal is to obtain the drag force and the drag coefficient in the velocity range of 0.6 and 4 Mach number. The drag coefficient of the carrier system is 0.342 at $M = 0.6$ and 7.65 at $M = 4$ as maximum and minimum value. The satellite carrier system drag coefficient varies in the range of 0.342- 7.65 for different Mach numbers. Also aerodynamic analysis of the system velocity and pressure contours are investigated and reported in different conditions.

Keywords: Satellite carrier, aerodynamics, drag force, drag coefficient, rocket-target.

Alçak İrtifa Dağıtım Sistemi için Uydu Taşıyıcı Yapısı Analizi ve Aerodinamik Özellikleri

ÖZ

Bu çalışma, alçak irtifa dağıtım sisteminin optimum parametrelerini bulmak için alçak irtifa uydu taşıyıcı sistemi yapısının ve aerodinamik karakteristik özelliklerinin analizini araştırmaktadır. Hesaplamalı Akışkanlar Dinamiği (CFD) araçları, sistemin yönetim denklemlerini çözmek ve taşıyıcı sistem etrafındaki hava akışını göstermek için kullanılır. Uydu taşıyıcı sistemin Bilgisayar Destekli Tasarım (CAD) yapısı Space-Claim kullanılarak oluşturulur ve ANSYS çözücüsüne aktarılır. Ticari CFD yazılımı, ANSYS Fluent kodu hava akış hızlarını, basıncı, sürüklenme kuvvetini ve sürüklenme katsayısını hesaplamak için kullanılır ve raporlanır. Bu çalışmada temel amaç, 0.6 ve 4 Mach sayısının hız aralığında sürüklenme kuvveti ve sürüklenme katsayısını elde etmektir. Taşıyıcı sistemin sürüklenme katsayısı maksimum ve minimum değer olarak $M = 0.6$ 'da 0.342 ve $M = 4$ 'te 7.65'tir. Uydu taşıyıcı sistem sürüklenme katsayısı, farklı Mach sayıları için 0.342-7.65 aralığında değişmektedir. Ayrıca sistem hızının ve basınç konturlarının aerodinamik analizi farklı koşullarda incelenmiş ve tartışılmıştır.

Anahtar Kelimeler: Uydu taşıyıcısı, aerodinamik, sürüklenme kuvveti, sürüklenme katsayısı, roket-hedef.

1. INTRODUCTION

The Satellite carrier model characteristics and design parameters as well as the exterior fluid structures are analyzed and investigated using CFD code. Generally these engineering designs are estimated at different carrier's velocities in literature. The current model was inspired by the demand to develop a carrier for the low altitude satellite system which is about 4 meters in length and 0.3 meters in diameter. The satellite carrier's maximum velocity is intended to be less than desired value. According to literature one of optimal nose cones for this carrier situation is parabolic one [1, 2]. As known, fluid structure around the satellite carrier system and aerodynamics design characteristics such as velocity, airflow, pressure, lift and drag force and others have a big

impact on the exterior lunch design of the satellite carrier system. The lift-drag force and the lift-drag coefficient are the main important design parameters for the satellite carrier system. Because necessary thrust properties of the system are directly related to exterior design parameters. CFD tools are widely preferred to investigate the equipment structures as the conceptual and preliminary design steps to decrease the production time and the costs in aeronautical applications before the experimental studies and production [3-5].

This study is related with the aerodynamic analysis of the satellite carrier system to be produced and the first aim is to obtain the drag and lift forces and the drag and lift coefficients in different velocity range of 0.6-4 Mach number.

*Sorumlu Yazar (Corresponding Author)
e-posta : hasan.koten@medeniyet.edu.tr

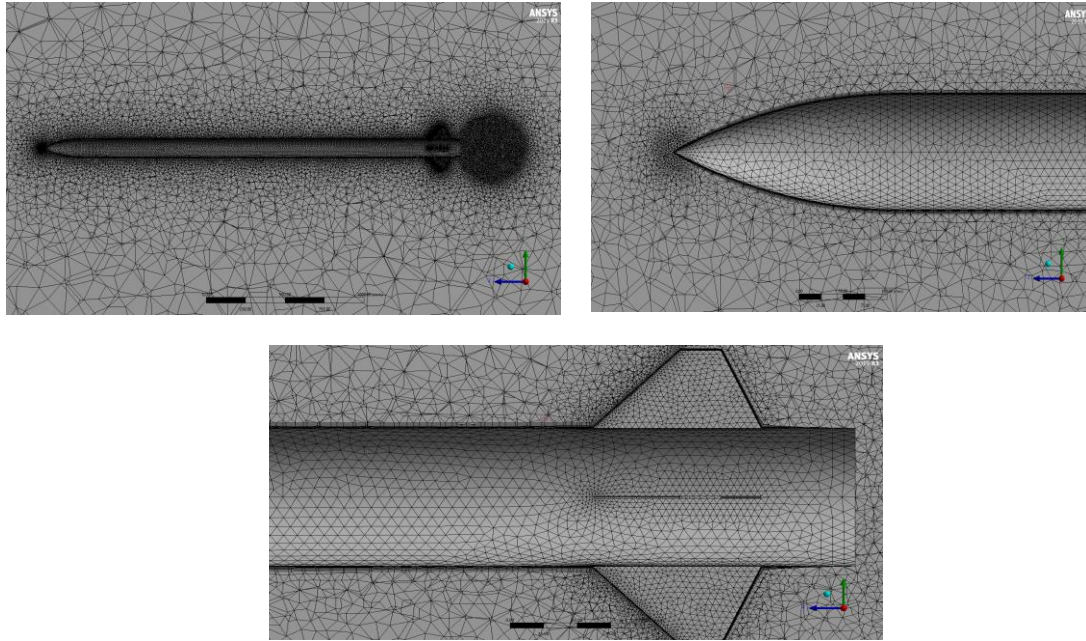


Figure 1. Mesh display of the satellite carrier

In different studies, Reynolds stresses and the shear stress transport (SST) turbulence model were modelled and studied around the wing of aircraft [6-9]. In this study, different conditions for the low altitude satellite carrier system were simulated and structure and aerodynamic characteristics of the system were analysed.

2. CFD CASES FOR THE SATELLITE CARRIER SYSTEM

The velocity contours for different Mach numbers, around the carrier system with nose and cones and around a carrier frame without a nozzle cone were given in Figure 2. The carrier diameter is 0.3 m. and the length of this system without nose is 4 m. The satellite carrier system length with the nose totally is 4.2 m and the nose diameter in the medium is 0.15 m.

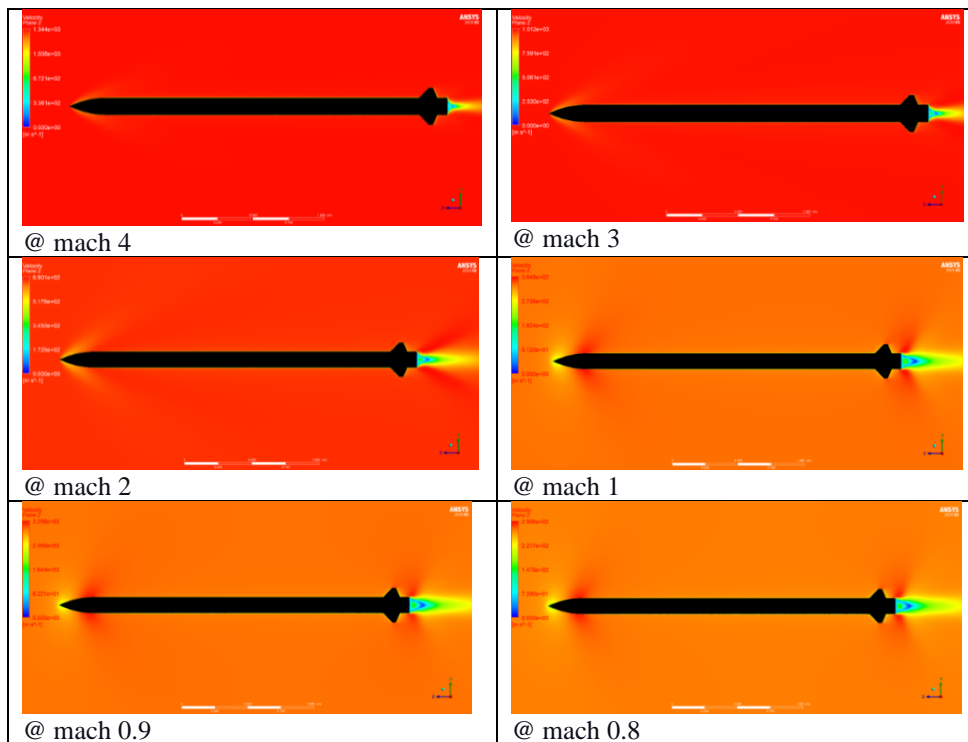


Figure 2. a Velocity contours in different mach numbers

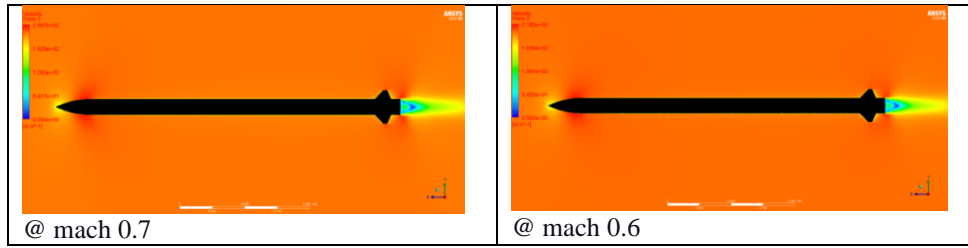


Figure 2. b Velocity contours in different mach numbers

Frontal area and drag coefficient calculations:

$$Frontal\ area\ (A) = 4 * 0.2 * 6.8 + \pi * \frac{6.8^2}{4}$$

$$= 120.44\ cm^2 = 0.01204\ m^2$$

$$Drag\ coefficient\ (Cd) = \frac{Drag\ force(Fd)}{0.5 * \rho * V^2 * A}$$

Table 1. Drag coefficients at different mach numbers.

Mach numbers	Drag coefficients
0.6 mach	0.342
0.7 mach	0.484
0.8 mach	0.685
0.9 mach	0.775
1 mach	1.02
2 mach	3.54
3 mach	5.63
4 mach	7.65

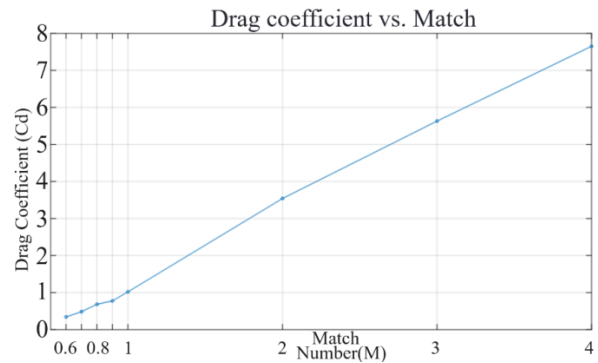


Figure 3. Drag coefficient versus Mach number

In Figure 3 and Table 1 drag coefficient calculations were given. According to literature drag and lift coefficients and also drag and lift forces are widely agreement with similar studies [6-7]. Also, in Figure 4 total pressure contours were given at different mach number. Different studies also used the same methodology to get the optimum design parameters [11-21].

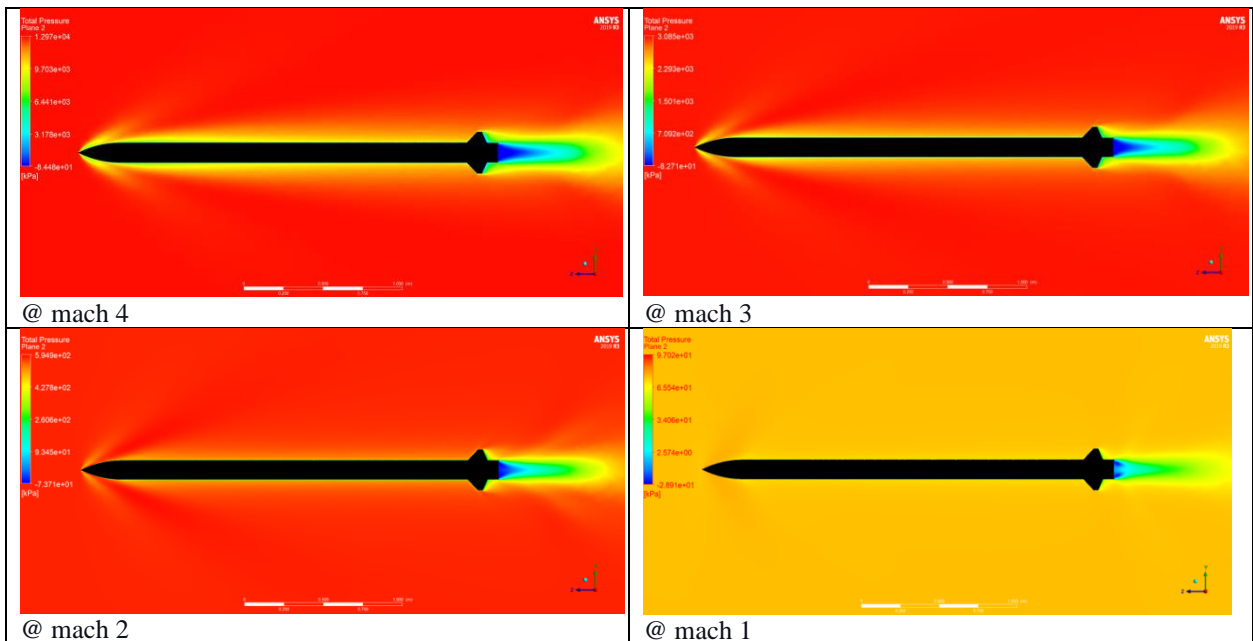


Figure 4. Total pressure contours at different mach number

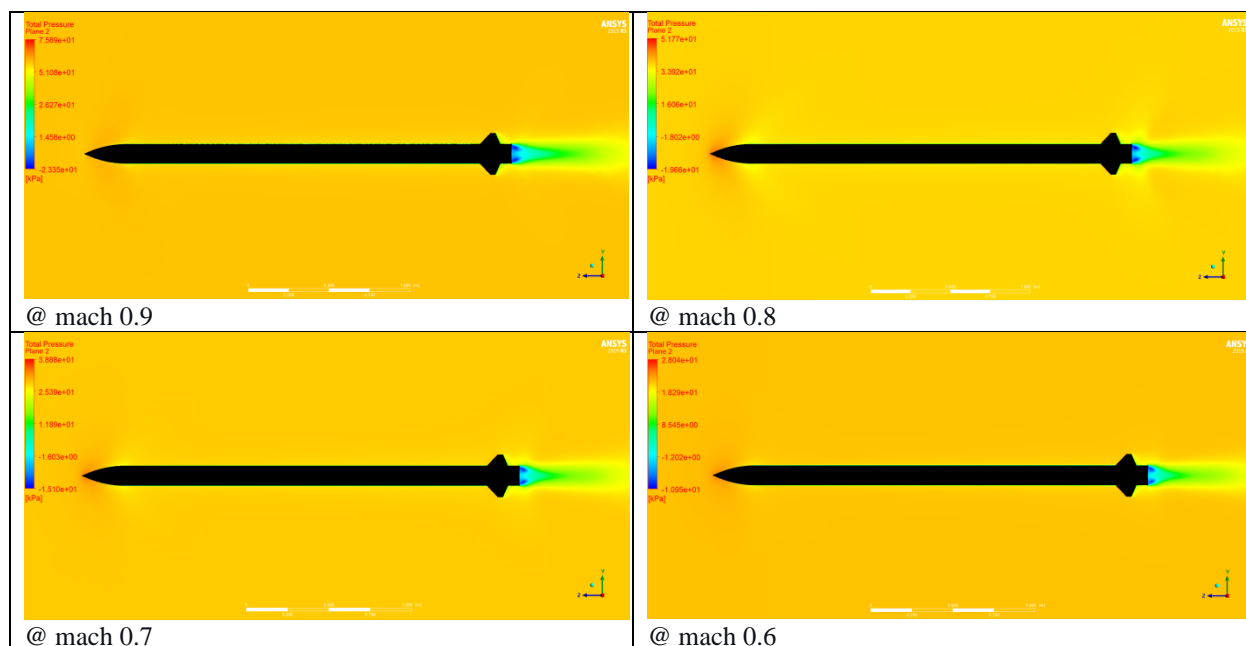


Figure 4. (cont.) Total pressure contours at different mach number

3. CONCLUSIONS

In this study, CFD calculations and aerodynamic performance of the satellite carrier system with nose and flow for the different cases were investigated and the desired aerodynamics properties for simulations of exterior structure were obtained.

- As a result, satellite carrier system drag force is significantly lower compared to the drag force of the system in low Mach numbers. Again, the drag coefficient of the carrier system is 0.342 at $M = 0.6$ and 7.65 at $M = 4$ as maximum and minimum value.
- The satellite carrier system drag coefficient varies in the range of 0.342- 7.65 for different Mach numbers. This design was developed for the low altitude satellite carrier systems which will be used in national project.

Also this system successfully was tested by computational techniques. Accordingly, satellite carrier system actual flight trajectory is widely and qualitatively agreement with the similar experimental and numerical studies in the literature.

DECLARATION OF ETHICAL STANDARDS

The author(s) of this article declare that the materials and methods used in this study do not require ethical committee permission and/or legal-special permission.

AUTHOR CONTRIBUTIONS

All authors have same contribution in manuscript.

CONFLICT OF INTEREST

There is no conflict of interest in this study.

REFERENCES

- [1] Fedaravičius A., S. Kilikevičius, A. Survila., "Optimization of the rocket's nose and nozzle design parameters in respect to its aerodynamic characteristics", *Journal of Vibroengineering*, Vilnius: Vibromechanika, 14(3) : 1390-1398, (2012).
- [2] Military Design Handbook, "Design of Aerodynamically Stabilized Free Rockets", *U.S. Army Missile Command*, (1990).
- [3] Schütte A., Einarsson G., Madrane A., Schöning B., Mönnich W., Krüger W.R., "Numerical simulation of maneuvering aircraft by CFD and flight mechanic coupling", *RTO Symposium*, Paris, (2002).
- [4] Kroll N., Rossow C.C., Schwamborn D., Becker K., Heller G., "MEGAFLOW-a numerical flow simulation tool for transport aircraft design". In *Proceedings of ICAS Congress*, 1105.1-1105.20, (2002).
- [5] Langtry R.B., Kuntz M., Menter F., "Drag prediction of engineairframe interference effects with CFX-5", *Journal of Aircraft*, 42(6) : 1523-1529, (2005).
- [6] Menter F.R., Kuntz M., Langtry R., "Ten years of industrial experience with the SST turbulence model". In *Turbulence, Heat and Mass Transfer 4*, (ed.: K. Hanjalic, Y. Nagano and M. Tummers), 625-632. Begell House, Inc, (2003).
- [7] Mills A.F., Irwin R.D., "Basic Heat and Mass Transfer", *University of California*, Los Angeles, (1995).
- [8] *ANSYS CFX-Solver Theory Guide*. ANSYS, Inc., Southpointe 275 Technology Drive Canonsburg, PA 15317: 23-96 (2006).
- [9] Fedaravičius, A., Jonevičius, V., Kilikevičius, S., Paukštaitis, L., & Šaulys, P., "Estimation of the drag coefficient of mine imitator in longitudinal air flow using numerical methods", *Transport*, 26(2), 166-170, (2011).
- [10] *ANSYS FLUENT-Solver Theory Guide*, ANSYS, Inc., Southpointe 275 Technology Drive Canonsburg, PA 15317 (2013).

- [11] McCormick , B. W., “*Aerodynamics, Aeronautics, and Flight Mechanics*”, 2nd edition. Wiley . 652 p, (1994).
- [12] Fedaravičius , A. Jonevičius , V. Ragulskis , M., Development of mortar training equipment with shell-in-shell system , in **Abstracts: 75th Shock & Vibration Symposium**, 18–22 October, 2004. Virginia Beach , VA , 70 – 71, (2004).
- [13] Fedaravičius, A., Ragulskis, M. and Klimavičius, Z., Computational support of the development of a mortar simulator with re-usable shells. *WIT Transactions on Modelling and Simulation: Computational Ballistics II*, 40: 381–389 (2005).
- [14] Lee , J. J. ; Kang , S. K. ; Yoon , S. J. ; Park , G. C. ; Lee , W. J., “Assessment of turbulence models in CFD code and its application to pebble bed reactor”, in **4th International Conference on Heat Transfer, Fluid Mechanics and Thermodynamics**, 19–22 September 2005 . Cairo , Egypt, (2005).
- [15] Fedaravičius, A., Jonevičius, V. and Ragulskis, M. “Development of mortar simulator with shell-in-shell system problem of external ballistics”, *Shock and Vibration*, 14(5): 371–376, (2007).
- [16] Fedaravičius, A., Šaulys, P. and Griškevičius, P., “Research of mine imitator interaction with nondeformable surface”, *Mechanika*, 6: 25–29, (2008).
- [17] Fedaravičius , A. Griškevičius , P. Šaulys , P. “Interaction modeling of the shell imitator and nondeformable surface”, in *Mechanika 2008: Proceedings of 13th International Conference*, 3–4 April, 2008 . Kaunas , Lithuania , 134 – 138, (2008).
- [18] Fedaravičius , A ; Griškevičius , P. Jonevičius , V. Šaulys , P. Ragulskis , M. K., Theoretical basis for creation of mortar firing simulators , in *Mechanika 2009: Proceedings of 14th International Conference*, 2–3 April 2009 . Kaunas , Lithuania , 102 – 110 (2009).
- [19] Fedaravičius, A, Šaulys, P and Griškevičius, P, “ Research of mine imitator interaction with deformable surface”, *Mechanika*, 2: 24–27, (2009).
- [20] Puoti , V. Izzo , C. Valenza , F. Fedaravičius , A. Survila , A. Patašienė , L. Ragulskis , M., “Experimental Drag Estimation on a Mortar Warhead” , in *Transport Means – 2009: Proceedings of 13th International Conference*, 22–23 October 2009 . Kaunas , Lithuania , 214 – 216, (2009).
- [21] Gokce H., Kucuk U.C., Sahin I., “Effects of Curvature and Area Distribution on S-Shaped Subsonic Diffuser Performance”, *Mechanics*, 24(6):770-776, (2018).