



FREE VIBRATION ANALYSIS OF AN AIRCRAFT WING BY CONSIDERING AS A CANTILEVER BEAM

¹Ali DEMİRTAŞ, ²Meral BAYRAKTAR

^{1,2}Department of Mechanical Engineering, Mechanical Engineering Faculty, Yildiz Technical University,
Besiktas, 34349 Istanbul, Turkey

¹alidemirrtas@gmail.com, ²mbarut@yildiz.edu.tr

(Geliş/Received: 25.08.2017; Kabul/Accepted in Revised Form: 02.03.2018)

ABSTRACT: The present paper presents the modal analyses of a NACA 4415 airfoil profiled wing. Theoretical and numerical calculations are performed by considering the aircraft wing as a cantilever beam. The model is created and modal analyses are performed by using commercially available packages of SolidWorks and Ansys, respectively. The natural frequencies and the related mode shapes are obtained. The results of theoretical calculations are compared with the numerical modal analyses. The study has a conclusion that an aircraft wing can be considered as a cantilever beam that by ignoring the whole forces on the aircraft (except for gravity).

Keywords: Airfoil, Wing, Cantilever Beam, Modal Analysis

Ankastre Kiriş Olarak Düşünülen Bir Uçak Kanadının Serbest Titreşim Analizi

ÖZ: Bu çalışmada NACA 4415 profiline sahip uçak kanadının modal analizi sunulmuştur. Uçak kanadı bir ankastre kiriş olarak düşünülerek teorik ve nümerik hesaplamalar gerçekleştirilmiştir. Kanadın modellenmesi ve modal analizi ticari paket programları SolidWorks ve Ansys ile yapılmıştır. Analiz sonucunda uçak kanadı modelinin doğal frekansı ve buna bağlı mod şekilleri elde edilmiştir. Teorik hesaplar neticesinde elde edilen sonuçlar nümerik modal analiz sonuçları ile karşılaştırılmıştır. Çalışmadan elde edilen sonuç, eğer yer çekimi kuvveti hariç diğer tüm kuvvetler ihmal edilirse, uçak kanadının ankastre bir kiriş olarak değerlendirilebileceği yönündedir.

Anahtar Kelimeler: Ankastre kiriş, Kanat, , Modal analizi, Uçak kanadı.

INTRODUCTION

The modal analysis is a common method used to investigate dynamical behaviors of mechanical structures under the dynamics excitation. Emitted noise reduction from the system to the environment is enabled by the modal analysis. It helps finding out the reasons of vibrations which cause damage on the system and used for reducing it. In short, one can improve the performance of a system by using modal analysis method. Two primarily known methods of modal analysis are the numerical modal analysis and the experimental modal analysis. The mathematical model is derived from the measurement input data, which is handled by the experimental modal analysis. The modal is constructed from two different levels of analysis and the primary part is used for determining the curve FRF (Ewins, 2000). FRF frequency response function is a mathematical representation of the relationship between the input and the output of a system.

The free vibration analysis of an aircraft wing is one of the hardest problems to deal with in the process of designing an aircraft. A fundamental aspect in examining gust responses and aeroelastic phenomena is to investigate the natural frequencies and modes. The wings of an aircraft are usually consisted of thin-walled, non-uniform and arbitrary shaped structures which usually have sweep and dihedral angles and are tapered. These properties come with complicated effects that require sophisticated structural modeling. There are three different models that can be used for structural analysis of an aircraft wing. These models are consisted of "one-dimensional (beams), two-dimensional (plates, shells) and three-dimensional (solids)". One of the main advantages of one-dimensional model is that it requires less computational effort compared to the analysis of shells or solids. Euler-Bernoulli and Timoshenko models can be given as well-known examples to classical beam models. The last one includes transverse shear-deformation and rotary inertia effect. As the non-classical effects increase, the classical beam models become obsolete due to their feasibility. Non-classical effects in a wing structure are usually caused by in and out of plane, warping, twisting, bending-torsion coupling, and higher-order shear effects, among others (Carrera et al., 2012).

Free vibration analysis of beams has been extensively investigated by many researchers since the beams are fundamental models for the structural elements of many engineering applications. Free vibration analysis on elastic foundation or Winkler foundation have been studied by Thambiratnam and Zhuge (1995), Ozturk and Coskun (2013) Kaçar et al.(2011). Nirmal and Vimala (2016) has investigated the vibration characteristics of beams made up of three different materials such as aluminum, brass, mild steel with respect to different parameters by theoretical and analytical method by using ansys software. They have reported that the natural frequency increases with decreases in thickness for each material.

Jaworski and Dowell (2008) have investigated the flexural-free vibration of a cantilevered beam with multiple cross-section steps theoretically and experimentally. They have compared the experimental results against Euler-Bernoulli beam theory solutions from Rayleigh-Ritz and component modal analyses, as well as finite element results using the commercial package ANSYS.

Amarendra and Rapuri (Amarendra and Rapuri, 2016) performed dynamic analysis of a doubly tapered and twisted beam (a geometrical approximation of a blade) and validated values of natural frequencies with the results of Gupta and Rao (Gupta and Rao, 1978). They also performed computational fluid dynamics (CFD) analysis to determine the lift and drag forces, their magnitude and directions on the blade. The obtained results of CFD analysis was used to conduct a stress analysis in ANSYS workbench by considering the designed geometry. These stresses were used for repetitive cycle for a fatigue analysis performed in the same workbench module.

Rajappan and Pugazhenth (Rajappan and Pugazhenth, 2013) have studied bending finite element analysis (FEA) of monocoque laminated composite aircraft (subsonic and supersonic) wing using ANSYS by considering various airfoil thickness and ply angles. The physical structure modeled was a shell aircraft wing of airfoil cross section NACA 4412 series with fiber laminated composite structure.

Erdener and Yaman (Erdener and Yaman, 2003) investigated the static and the dynamic characteristics of an aircraft wing in order to see the effects of probable internal fuel and the external stores on the dynamic characteristics by using MSC/PATRAN and MSC/NASTRAN. It was concluded that the natural frequencies for the 1st and 4th modes decrease about 66% rate in the case of full fuel and considering all external forces.

Khadse, N.A. and Zaweri, (Khadse and Zaweri, 2015) studied on the modal analyses of an aircraft wing that was considered as a cantilever beam. The structure of the aircraft consisted of NACA 64A215. The computer aided model (CAD) model of the wing was developed by using PROE 5.0 and modal analysis was carried out by means of ANSYS WORKBENCH 14.0. The six- modes of vibration were obtained as a result of theoretical and numerical studies

Lengvarský et al. (Lengvarský et al., 2013) carried out modal analyses on titan cantilever beam. They obtained mode shapes and natural frequencies by ANSYS and SolidWorks with numerical formulation

of the direct solver including the block Lanczos method as 94.02 [Hz], 207.58 [Hz], 324.32 [Hz], 570.47 [Hz], 823.64 [Hz].

In the present study, natural frequency and mode shapes of an aircraft wing were obtained by considering the wing as a cantilever beam. The wing model was created in SolidWorks by selecting the airfoil profile as NACA 4415. The model, then was simulated in ANSYS by applying proper boundary conditions to perform numerical modal analyses. The results of numerical modal analysis were compared with the results of theoretical approach of cantilever beam.

THEORETICAL CALCULATION

For a cantilever beam shown in Figure 1, the natural frequency for each mode was calculated from Euler-Bernoulli Beam Theory's natural frequency equations (Eq.1,2,3) (Rao, 2011):

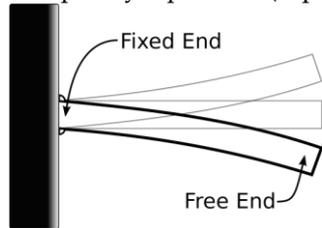


Figure 1. Cantilever beam.

$$\omega_n = (\beta_n L)^2 \sqrt{\frac{EI}{mL^4}} \quad (1)$$

where E (Pa) is Young Modulus, I (kg/m²) is moment of inertia, m (kg/m) is mass per unit length, L (m) is length. $\beta_n L$ is obtained by means of Eq.2 and Eq.3;

$$\frac{d^2}{dx^2} \left\{ EI \frac{d^2 Y(x)}{dx^2} \right\} = \omega^2 m(x) Y(x) \quad (2)$$

$$\beta^4 = \frac{\omega^2 m}{EI} \quad (3)$$

The magnitudes of $(\beta_n L)$ are given in Table 1:

Table 1. Magnitude of $(\beta_n L)$ (Rao, 2011).

n	$(\beta_n L)$
1	1,8751
2	4,69409
3	7,8539
4	10,99557
5	14,1372
6	17,279

The span wise bending stiffness distribution $EI(z)$ (Pa.kg/m²) along the primary axis of loading is required to calculation of the vertical deflection of a wing. E (Pa) is a simple scaling factor for a uniform wing made of solid material. The moment of inertia of the airfoil cross-sections about the bending axis- x (called the bending inertia), is related $Y_u(x)$ and $Y_l(x)$ as shown in Figure 2. Both the area A (m²) and total bending inertia I (kg/m²) are the integrated contributions of all the infinitesimal rectangular sections, each dx (wide) and $Y_u - Y_l$ (height). The inertia of each such section was appropriately taken about the neutral surface position \bar{y} defined for the entire cross section (MIT Open Courseware).

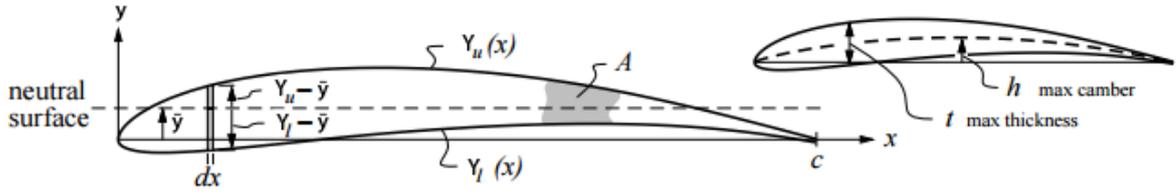


Figure 2. Quantities for determining and estimating the bending inertia of an airfoil section) (MIT OpenCourseWare).

The corresponding equations are provided below (Eq.4-Eq.10).

$$A = \int_0^c (Y_u - Y_l) dx \quad (4)$$

$$\bar{y} = \frac{1}{A} \int_0^c \frac{1}{2} (Y_u^2 - Y_l^2) dx \quad (5)$$

$$I = \int_0^c \frac{1}{3} [(Y_u - \bar{y})^3 - (Y_l - \bar{y})^3] dx \quad (6)$$

$$t = \max\{Y_u(x) - Y_l(x)\} \quad (7)$$

$$h = \max\{[Y_u(x) + Y_l(x)]/2\} \quad (8)$$

$$K_A \leftarrow \frac{1}{c^2 \tau} A \int_0^c [Y_u(x) - Y_l(x)] dx \quad (9)$$

$$K_I \leftarrow \frac{1}{c^4 \tau (\tau^2 + \varepsilon^2)} \int_0^c \frac{1}{3} [(Y_u - \bar{y})^3 - (Y_l - \bar{y})^3] dx \quad (10)$$

But there are approximate values for K_I and K_A for most common airfoils as $K_I=0.036$ and $K_A=0.6$. A (m²) and I (kg/m²) can be calculated as given in Eq.11 and Eq.12, respectively.

$$A \cong K_A c t \quad (11)$$

$$I \cong K_I c t (t^2 + h^2) \quad (12)$$

Theoretical Analyses of NACA4415 Profiled Wing

The calculations of area and moment of inertia for NACA 4415 profiled wing were performed by getting the data from Airfoil Tools. The chord length and wing length was selected as 1 m and 5 m, respectively while the material was considered as Aluminium Alloy 6061.

For the calculation of Eq.7 and Eq.8 from airfoil data of NACA 4415, the .dat file was imported in to Microsoft Excel and it was organized and presented in Table 2.

Table 2. Organized columns from the data of airfoil profile

x	$Y_u(x)$	$Y_l(x)$	$Y_u(x) - Y_l(x)$	$[Y_u(x) + Y_l(x)]/2$
1	0	0	0	0
0,99893	0,00039	-0,00011	0.0005	0.00014
0,99572	0,00156	-0,00042	0.00198	0.00057
0,99039	0,00349	-0,00092	0.00441	0.001285
0,98296	0,0061	-0,00156	0.00766	0.00227
0,97347	0,00932	-0,00227	0.01159	0.003525
0,96194	0,01303	-0,00297	0.016	0.00503
0,94844	0,01716	-0,00364	0.0208	0.00676
0,93301	0,02166	-0,00431	0.02597	0.008675
0,91573	0,02652	-0,00502	0.03154	0.01075
0,89668	0,03171	-0,00583	0.03754	0.01294
0,87592	0,03717	-0,00674	0.04391	0.015215
0,85355	0,04283	-0,00775	0.05058	0.01754
0,82967	0,04863	-0,00886	0.05749	0.019885
0,80438	0,05453	-0,01006	0.06459	0.022235
0,77779	0,06048	-0,01136	0.07184	0.02456
0,75	0,06642	-0,01277	0.07919	0.026825

After MAX command was applied to the columns named $Y_u(x) - Y_l(x)$ and $[Y_u(x) + Y_l(x)]/2$ rows, t (m) and h (m) values were determined as;

$$t = \tau = 0,14994 \text{ m and } h = \varepsilon = 0,040095 \text{ m}$$

Substituting the obtained results in Eq.11;

$$A \cong K_{Ac}t = K_{Ac}^2\tau = 0,6 \times 12 \times 0,14994 = 0,089964 \text{ [m}^2\text{]}$$

Moment of inertia was obtained from Eq.12;

$$I \cong K_{Ict}(t^2 + h^2) = K_{Ic}^4\tau(\tau^2 + \varepsilon^2) = 0,036 \times 1^4 \times 0,14994 \times (0,14994^2 + 0,040095^2) = 0,00013003187461173 \text{ [m}^4\text{]}$$

According to material selection of wing (Aluminum Alloy 6061), following parameters were used;(MatWeb ASM Aerospace Specification Metals)

$$E = 69 \times 10^9 \text{ [Pa]}$$

$$I = 0,00013003187 \text{ [m}^4\text{]}$$

$$m = \rho \times A = 2700 \times 0,089964 = 242,9028 \text{ [kg/m]}$$

$$L = 5 \text{ [m]}$$

$$\text{So, the natural frequencies were obtained as; } \omega_n f = (B_n L)^2 \sqrt{\frac{EI}{mL^4}} = (B_n L)^2 \sqrt{\frac{69 \times 10^9 \times 0,00013003187}{242,9028 \times 5^4}} =$$

$$(B_n L)^2 \times 7,6876$$

As a result, the natural frequency of each mode which is obtained by using

$$\omega_n f = (B_n L)^2 \times 7,6876 \text{ was presented in Table 3.}$$

Table 3. Natural frequency results


	$B_n L$	$\omega_n f$ [rad/sec]	$f_n f$ [Hz]
1	1.8751	27,0296	4,301895
2	4.69409	169,3923	26,95962
3	7.8539	474,2	75,47127
4	10.99557	929,4505	147,9266
5	14.1372	1536,447	244,5331
6	17.279	2295,239	365,2987

MODAL ANALYSES

In order to predict the dynamic behavior of the structure properly via forming FEM, the model should be validated by tests. In the validation process, obtained test data were used for comparing with the predicted data obtained by FEM. If the model is incapable to predict the dynamic properties of the structure accurately, it has to be included some useful information about the dynamic properties of the structure (Bagul et al., 2014). In the study of Bagul et al., the confirmation has been performed by using ANSYS Workbench .

The modeled structure was an aircraft wing of airfoil cross section NACA 4415 series with Aluminum Alloy 6061. The chord length of the airfoil is 1 m and wing length is 5 m.

After the wing model was created in SolidWorks (Figure 3), it was treated as cantilevered beam which was fixed at one end and free at the other end.

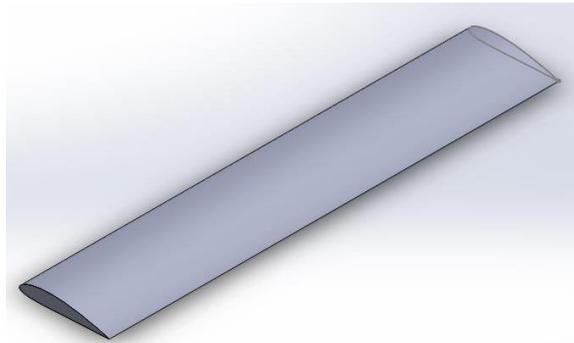**Figure 3.** The model of the wing.

The total number of nodes generated in the meshing of the test structure is 16202, and the total number of elements is found to be 2890. The mesh structure was presented in Figure 4.



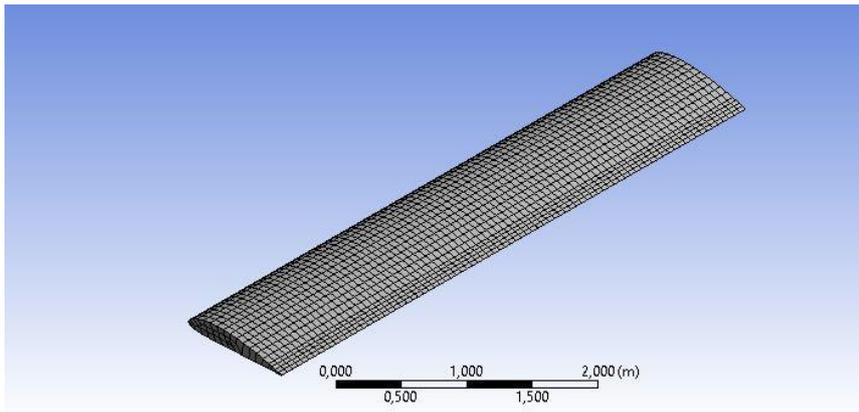


Figure 4. The obtained modes of the wing


The modal analyses were performed by using ANSYS and the obtained modes of the wing were presented in Figure 5. The related frequencies were also given in Table 4.(Torsional modes and frequencies were ignored).

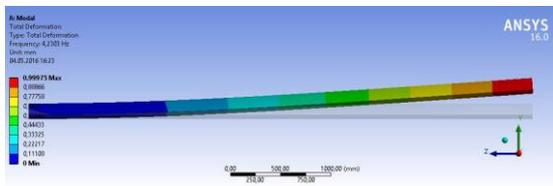


a) 1st mode

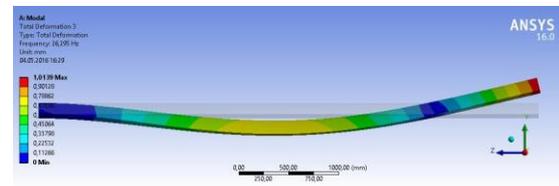


b) 2nd mode

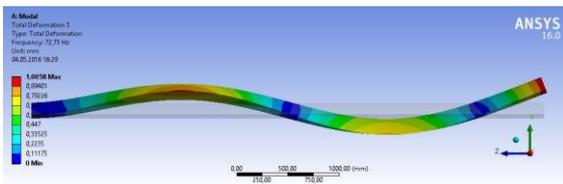


c) 3rd mode

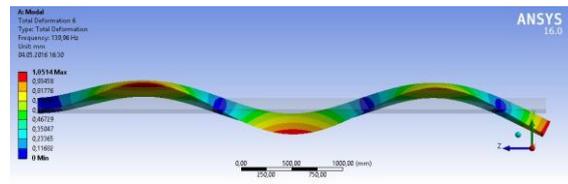

d) 4th mode

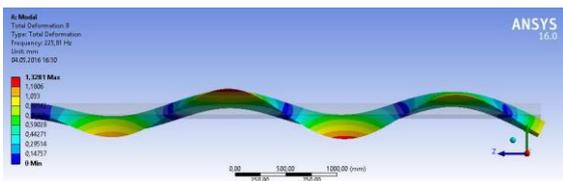

e) 5th mode

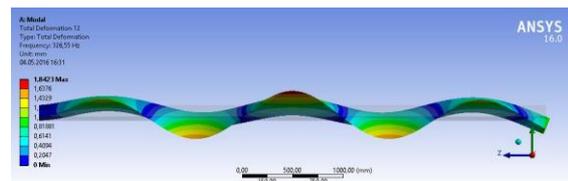

f) 6th mode

Figure 5. The obtained modes & mode shapes of the wing**Table 4.** Natural frequency results of numerical modal analysis.

Natural Frequency	
Modes	Frequency (Hz)
1	4,2446
2	26,374
3	72,916
4	140,23
5	226,03
6	326,32

COMPARISON OF RESULTS AND DISCUSSION

In this section, results of numerical modal analyses and analytical method are compared. The obtained natural frequencies of both analysis (modal and theoretical) are presented in Table 5 and plotted in Figure 6. As it can be seen there are a good agreement between two methods at the first mode. As the mode number increases the error ratio between numerical and theoretical methods increases. These errors may have been caused by the empirical formulas (Eq.11 and Eq.12) and the meshing quality that affects greatly a FEA results.

Table 5. Comparison of results by considering error ratio.

Modes	Natural frequencies (Hz)		Error ratio (%)
	Theoretical results	Numerical results	
1 st	4,301895	4,2446	1,349833
2 nd	26,95962	26,374	2,220444
3 rd	75,47127	72,916	3,504402
4 th	147,9266	140,23	5,488555
5 th	244,5331	226,03	8,186126
6 th	365,2987	326,32	11,94493

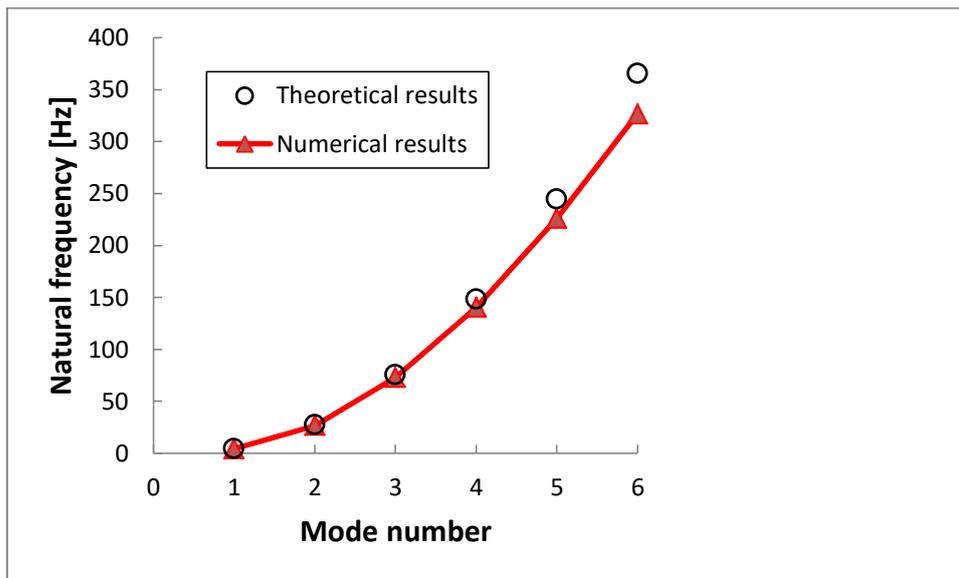


Figure 6. Comparative curves of cantilever beam frequency.

CONCLUSION

In this study, the wings of aircraft was considered as a cantilever beam in order to perform modal analysis. The results of numerical modal analysis and theoretical approach method of cantilever beam were compared. It was seen that natural frequency obtained from numerical and theoretical approaches are in good agreement. The validation of modal analysis of cantilever beam proved that the procedure opted for numerical modal analysis of aircraft wing and its result are correct.

SYMBOLS

ω_n : Natural Frequency [rad/sec]

f_n : Natural Frequency [Hz]

β_n : Natural Angle [rad]

L: Length [m]

E: Young Modulus [Pa]

I: Moment of Inertia [kg/m^2]

m: Mass per length [kg/m]

A: Area [m^2]

$Y_u(x)$: Maximum $Y(x)$ value of The Wing [m]

$Y_l(x)$: Minimum $Y(x)$ value of The Wing [m]

\bar{y} : Average value of Y_u and Y_l [m]

K_A : Proportionality coefficient of Area

K_I : Proportionality coefficient of Moment of Inertia

t: Maximum Thickness of The Wing [m]

h: Maximum Camber of The Wing [m]

c: Chord Length of The Wing [m]

REFERENCES

Airfoil Tools, <http://www.airfoildata.com>, visit date: August 23, 2017

Amarendra K., Rapuri, A.K., 2016, Dynamic Analysis of A Wind Turbine Blade, *Advanced Research Journals of Science and Technology (ARJST)*, 134-139

- Bagul A. D., Barijibhe R. B. and Patil A. V., 2014, Vibrational Analysis of Gearbox Casing Component using FEA Tool ANSYS and FFT Analyser, *International Journal of Engineering Research & Technology (IJERT)*, Vol. 3 Issue 2.
- Carrera E., Marco Petrolo M., Varello, A., 2012, Advanced Beam Formulations for Free-Vibration Analysis of Conventional and Joined Wings, *J. Aerosp. Eng.*, 25(2), 282-293, 2012.
- Erdener. Ö. and Yaman. Y., 2003, Bir Uçak Kanadının Yapısal Modelinin Geliştirilmesi, *Ulusal Makine Teorisi Sempozyumu (UMTS)*.
- Ewins, D.J., 2000, *Modal Testing: Theory, Practice and Application*. England: Wiley, Second Edition
- Gupta, R.S. and Rao, S.S., 1978, Finite Element Eigenvalue Analysis of Tapered and Twisted Timoshenko Beams. *Journal of Sound and Vibration* 56(2), pp 187- 200.
- Jaworski, J.W. and Dowell, E.H., (2008), Free vibration of a cantilevered beam with multiple steps: Comparison of several theoretical methods with experiment, *Journal of Sound and Vibration* Vol. 312, Issues 4–5, pp 713-725
- Kacar, A., Tan, H.T. and Kaya, M.O., 2011. Free Vibration Analysis Of Beams On Variable Winkler Elastic Foundation By Using The Differential Transform Method, *Mathematical and Computational Applications*, Vol. 16, No. 3, pp. 773-783.
- Khadse, N.A. and Zaveri, S.R., 2015, Modal Analysis of Aircraft Wing using Ansys Workbench Software Package, *International Journal of Engineering Research & Technology (IJERT)*, ISSN: 2278-0181, IJERTV4IS070291, Vol. 4, Issue 7.
- Lengvarský, P., Bocko, J., Hagara, M., 2013, Modal Analysis of Titan Cantilever Beam Using ANSYS and SolidWorks, *American Journal of Mechanical Engineering*, Vol. 1, No. 7, 271-275.
- MIT OpenCourseWare, <http://ocw.mit.edu/courses/aeronautics-and-astronautics/16-01-unified-engineering-i-ii-iii-iv-fall-2005-spring-2006/systems-labs-06/spl10b.pdf>, visit date: August 23, 2017
- MatWeb ASM Aerospace Specification Metals
<http://asm.matweb.com/search/SpecificMaterial.asp?bassnum=ma6061t6>, visit date: November 6, 2017
- Nirmall, T. and Vimala, S., (2016). Free Vibration Analysis of Cantilever Beam of Different Materials, *International Journal of Applied Engineering Research* ISSN 0973-4562 Volume 11, Number 9, pp 6521-6524.
- Ozturk, B. and Coskun, S.B., 2013, Analytical Solution for Free Vibration Analysis of Beam on Elastic Foundation with Different Support Conditions, *Mathematical Problems in Engineering* Volume <http://dx.doi.org/10.1155/2013/470927>.
- Rajappan, R. and Pugazhenti, V. , 2013, Finite Element Analysis of Aircraft Wing Using Composite Structure, *The International Journal of Engineering And Science (IJES)*, Volume2, Issue 2, Pages 74-80 ISSN: 2319 – 1813 ISBN: 2319 – 1805.
- Rao, S.S. , 2011, *Mechanical Vibrations*, 5th Edition, Pearson.
- Thambiratnam, D. and Zhuge, Y., 1996. Free Vibration Analysis of Beams on Elastic Foundation, *Computers & Structures* Vol. 60. No 6. pp 971-980.