

Fe²⁺/Persülfat ve Isı/Persülfat Yöntemleri ile Alcain Mavisi 8GX Giderimi

Ghislain Tayue Tatsenguem¹, Şifa Doğan²

¹ Cyprus International University, Engineering Faculty, Environmental Engineering Department, Haspolat, Nicosia, North Cyprus via Mersin 10 Turkey. E-mail: tayueg@gmail.com, Orcid No: 0009-0005-8923-435X

² Cyprus International University, Engineering Faculty, Environmental Engineering Department, Haspolat, Nicosia, North Cyprus via Mersin 10 Turkey. E-mail: sdogan@ciu.edu.tr, Orcid No: 0000-0002-9307-5348

Geliş/Received :04.07.2024 ; Kabul/Accepted :18.09.2024 ; Revize/Revised : 16.09.2024

Öz

Anahtar Kelimeler
Alcain Mavisi 8GX;
İleri oksidasyon; Tekstil atıksu arıtımı;
Fe²⁺/Persülfat;
Heat/Persülfat.

Bu çalışma, Alcain Mavisi 8GX boya çözeltilerinin demir (II) iyonu ve ısı aktivasyonuna dayalı persülfat oksidasyonu ile suların arıtımını içermektedir. Giderim çalışmaları üç farklı sıcaklık (40 °C, 60 °C ve 80 °C) ve farklı boya:Fe²⁺:persülfat molar dozlarında (1:1:1, 1:2:1, 1:1:0.5, 1:4:1) gerçekleştirilmiştir. Buna ilaveten, pH'in giderime etkisi iki farklı pH koşullarında (3 ve 5.7) test edilmiştir. Sonuçlar, artan sıcaklığın ve persülfat dozunun Alcain Mavisi 8GX giderimini artırdığını göstermiş ve pH 3 koşullarında 90 dakika sonunda 80 °C sıcaklıkta % 91 giderilmiştir. Fe²⁺/Persülfat yöntemi ise 1:1:1 boya:Fe²⁺:persülfat molar dozunda pH 3 koşullarında 90 dakika sonunda % 73 boya giderimi sağlamıştır; 1:2:1 koşullarında pH 5.7'de ise % 72 giderim gözlenmiştir.

Alcain Blue 8GX Remediation by Fe²⁺/Persulfate And Heat/Persulfate

Abstract

Keywords
Alcain Blue 8GX;
Advanced oxidation;
Textile wastewater treatment;
Fe²⁺/Persulfate;
Heat/Persulfate.

In this work, decolorization of reactive Alcain Blue 8GX dye solution were investigated by persulfate oxidation activated by ferrous ion and heat. Three different temperature (40 °C, 60 °C and 80 °C) were tested during heat activated persulfate and ferrous ion activated persulfate were tested under various molar ratios of dye:Fe²⁺:persulfate ratio (1:1:1, 1:2:1, 1:1:0.5, 1:4:1). In addition, pH effect has been tested at ambient conditions (5.23) and pH of 3. The results showed that increasing the temperature and persulfate concentration was favorable to the degradation of the dye with decolorization efficiency as high as 91 % observed at 80 °C after 90 minutes of reaction at pH 3. The ratio 1:1:1 decolorized AB 8GX 73 % at pH of 3 and 72 % at pH 5.7 after 90 minutes.

© Afyon Kocatepe Üniversitesi

1. Introduction

Since the beginning of 21 century, human being is responsible of Water pollution which is the most serious environmental issues and which causes odor problems and affects health. Among various

kinds of water pollutants, residual dyes discharged from textile, paper industries and biomedical laboratories are universal and harmful to life due to their high chemical oxygen demand, heavy color and high toxicity, carcinogenicity and mutagenicity. (Hayat et al. 2015). Activated persulfate provides a

unique technology that can provide both oxidative and reductive processes to treat a wide range of contaminants that can be applied to soils and groundwater. As a result, persulfate is effective in destroying a wide range of organic contaminants and can address mixed contaminant plumes of petroleum products and chlorinated solvents. Alcian Blue 8GX is a cationic dye used to quantitatively determine glycosaminoglycans by forming insoluble complexes in solution. Alcian Blue 8GX can be used to determine proteins based on their Resonance Light Scattering by strongly enhancing the signals. It is useful as a bacterial stain, and as a dye for histiocytes and fibroblasts. Alcian Blue 8GX is used as a heteroglycan stain for neutral, sulfated and phosphated mucopolysaccharides and glycosaminoglycans in tissues such as cartilage and extracellular matrices. Once it becomes a wastewater, it is a recalcitrant water pollutant (Figure 1).

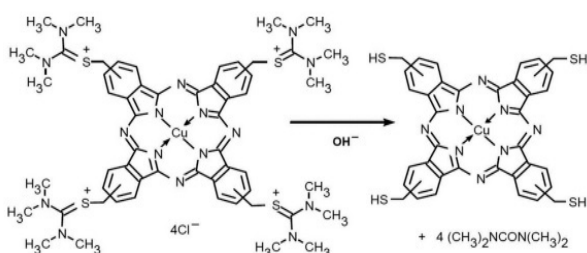


Figure 1. Structure of alcian blue 8G and its reaction with alkali to form an insoluble pigment (Scott 1972).

Various biological, chemical and physical methods are adopted for the treatment of dyes which is discharged as effluent from industries (Ayed et al. 2021; Montañez-Barragán et al. 2020; Agrawal and Verma 2020; Kristianto et al. 2020; Garvasis et al. 2020). Different methods are reviewed for the removal of dyes and it is noticed that adsorption (Zhang et al. 2021; Radwan et al. 2020) is found to be most economical among all methods. However, the treatment ends up with accumulation of the pollutants which required further treatment. Therefore, advanced oxidation methods regarded to be the best alternative for ultimate removal of recalcitrant pollutants (Wang et al. 2020; Abdi et al. 2020; Muneer et al. 2020; Shi et al. 2021). In this

study, the efficiency of Fe²⁺/Persulfate and Heat/Persulfate techniques were tested for Alcian Blue 8GX removal from water.

2. Materials and Methods

2.1 Materials

Alcian Blue 8GX (AB 8GX) purchased from Sigma (a blue powder soluble in water). Iron (II) sulfate heptahydrate (FeSO₄), Hydrochloric acid (HCl) purchased from Merck used for pH adjustment. Potassium peroxydisulfate (K₂S₂O₈) purchased from Merck (Germany) serve as source of persulfate anion. Deionized water produced by Sartorius Arium 61316.

2.2 Experimental and Analytical Methods

2.2.1 Experimental methodology

AB 8GX was prepared by measuring 0.05 g of AB 8GX with a weighing balance, pouring into a 1000 ml graduated flask and filled with deionized water. 250 ml of 50 mg/L AB 8GX was placed in an erlenmeyer flask and placed on a magnetic stirrer for continuously mixing. Required amount of persulfate (PS) was added and stirred for around 10min for dissolution. Final step of Fe²⁺/Persulfate process was to add the required amount of Fe²⁺ and after the reaction started samples were collected for absorbance measurement at different time intervals. The final step of Heat/Persulfate process was placing the Erlenmeyer in pre-adjusted water bath with desired temperature. Similarly, samples were collected at specific time intervals to reveal the decolorization efficiency. In this study, acidic and ambient pH was used to test process efficiency. pH was adjusted by 0.1 M HCl and measured by WTW inoLab 720 type pH meter. pH was not controlled throughout the experiments and it was observed that acidic pH remained constant and ambient pH dropped to 2.9-3.0.

2.2.2 Analytical methodology

AB 8GX concentration was measured by UV-visible spectrophotometer (UV-2450 Shimadzu) at 616 nm.

3. Results

3.1 Efficiency of Fe²⁺/Persulfate Process for AB 8GX Removal

Fe²⁺/Persulfate process efficiency was tested under various Dye:Fe²⁺:persulfate molar ratio and the experimental design is given in Table 1.

The experiments conducted under ambient pH 5.23 is given in Figure 2. It was observed that PS alone was able to decolorize AB 8GX at 46 % after 90 minutes. Addition of Fe²⁺ at 1:1:1 dose slightly increased the decolorization but there was high removal under 1:2:1 molar ratio which was 72 % after 90 minutes. The standard deviation average reported during (0 to 90 minutes) was ±2.91 %.

Table 1. Dye:Fe²⁺:persulfate molar ratio for Fe²⁺/Persulfate oxidation

Dye:Fe ²⁺ :Persulfate Molar Ratio	AB 8GX (mg/L)	Fe ²⁺ (mg/L)	Persulfate (mg/L)
1:1:1	50	200	2000
1:2:1	50	400	2000
1:1:0.5	50	200	1000
1:4:1	50	800	2000

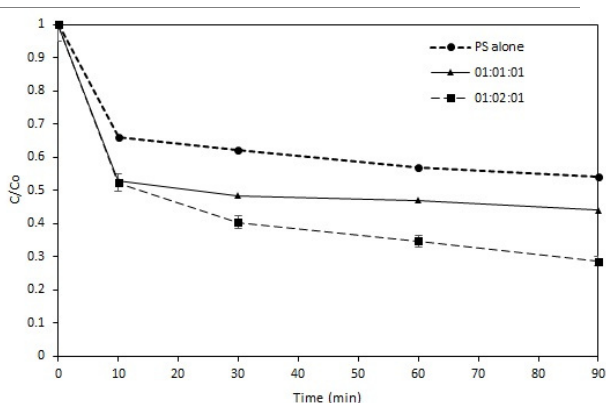


Figure 2. Decolorization of AB 8GX at 1:1:1 molar ratio

Persulfate alone and 1:2:1 molar ratio during Fe²⁺/Persulfate process at pH 3 resulted with almost similar removal which were 63 % and 61 %, respectively. Under 1:1:1 molar ratio 73 %

absorbance removal was recorded (Figure 3). In addition, other molar ratios namely 1:1:0.5 and 1:4:1 resulted with 65 % and 64 % removal at pH 3, respectively.

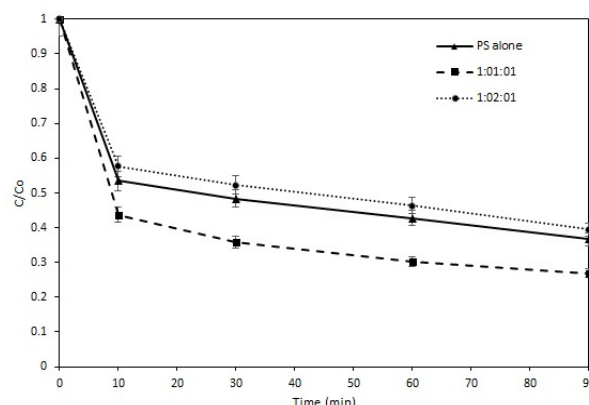


Figure 3. Decolorization of AB 8GX at pH 3 by Fe²⁺/Persulfate

3.2 Efficiency of Heat/Persulfate Process for AB 8GX Removal

The experimental results under ambient pH conditions (5.7) are represented in Figure 4. It was observed that at 40 °C to 60 °C the percentage of degradation of AB 8GX was 72 % and 74 %, respectively. When the temperature raised to 80 °C, high decolorization 87 % was recorded. Under acidic pH conditions, the removal was increase to 91 % at 80 °C which can be attributed to higher generation of sulfate radicals.

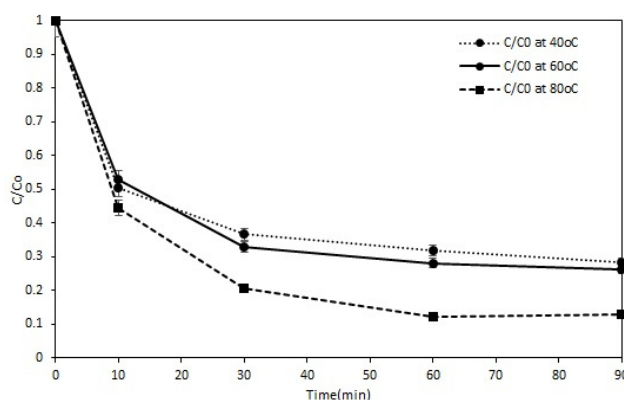


Figure 4. Decolorization of AB 8GX by Heat/Persulfate process at pH 5.7

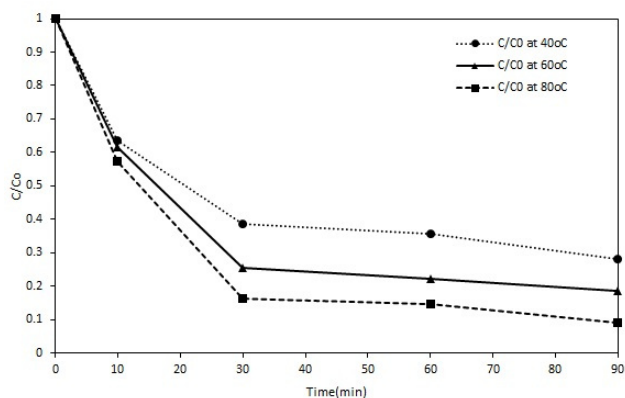


Figure 5. Decolorization of AB 8GX by Heat/Persulfate process at pH 3

4. Conclusion

Heat activated persulfate produced highly reactive and strong radical that was useful for decolorization of AB 8GX. It was observed that the combination of heat and persulfate was efficient for the degradation of AB 8GX at pH 3 than Fe²⁺/Persulfate process. The highest removal was obtained at 80 °C and pH 3 which was 91 %. It is further recommended to measure mineralization and persulfate consumption to understand the persulfate oxidation mechanisms on particular topic.

5. References

Abdi, M., Balagabri, M., Karimi, H., Hossini, H., Rastegar, S.O., 2020. Degradation of crystal violet (CV) from aqueous solutions using ozone, peroxone, electroperoxone, and electrolysis processes: a comparison study. *Applied Water Science*, 10(7), 1-10.

Agrawal, K., Verma, P., 2020. Myco-valorization approach using entrapped *Myrothecium verrucaria* ITCC-8447 on synthetic and natural support via column bioreactor for the detoxification and degradation of anthraquinone dyes. *International Biodeterioration & Biodegradation*, 153, 105052.

Ayed, L., Ladhari, N., Achour, S., Chaieb, K., 2021. Decolorization of Reactive Yellow 174 dye in real textile wastewater by active consortium: Experimental factorial design for bioremediation process optimization. *The*

Journal of The Textile Institute, 112(9), 1449-1459.

Garvasis, J., Prasad, A.R., Shamsheera, K.O., Jaseela, P.K., Joseph, A., 2020. Efficient removal of Congo red from aqueous solutions using phyto-genic aluminum sulfate nano coagulant. *Materials Chemistry and Physics*, 251, 123040.

Hayat, H., Mahmood, Q., Pervez, A., Bhatti, Z. A., Baig, S.A., 2015. Comparative decolorization of dyes in textile wastewater using biological and chemical treatment. *Separation and Purification Technology*, 154, 149-153.

Kristianto, H., Tanuarto, M.Y., Prasetyo, S., Sugih, A.K., 2020. Magnetically assisted coagulation using iron oxide nanoparticles-Leucaena leucocephala seeds' extract to treat synthetic Congo red wastewater. *International journal of environmental science and technology*, 17(7), 3561-3570.

Montañez-Barragán, B., Sanz-Martín, J.L., Gutiérrez-Macías, P., Morato-Cerro, A., Rodríguez-Vázquez, R., Barragán-Huerta, B.E., 2020. Azo dyes decolorization under high alkalinity and salinity conditions by *Halomonas* sp. in batch and packed bed reactor. *Extremophiles*, 24(2), 239-247.

Muneer, M., Kanjal, M.I., Saeed, M., Javed, T., Haq, A.U., Den, N.Z.U., Iqbal, M., 2020. High energy radiation induced degradation of reactive yellow 145 dye: A mechanistic study. *Radiation Physics and Chemistry*, 177, 109115.

Radwan, E.K., Abdel-Aty, A.M., El-Wakeel, S.T., Abdel Ghafar, H.H., 2020. Bioremediation of potentially toxic metal and reactive dye-contaminated water by pristine and modified *Chlorella vulgaris*. *Environmental Science and Pollution Research*, 27(17), 21777-21789.

Scott, J.E., 1972. Amplification of staining by Alcian Blue and similar ingrain dyes. *Journal of Histochemistry & Cytochemistry*, 20(9), 750-752.

Shi, J., Wang, J., Liang, L., Xu, Z., Chen, Y., Chen, S., Wang, S., 2021. Carbothermal synthesis of biochar-supported metallic silver for enhanced photocatalytic removal of methylene blue and antimicrobial efficacy. *Journal of Hazardous Materials*, 401, 123382.

- Wang, Z., Zhang, Y., Li, K., Sun, Z., Wang, J., 2020. Enhanced mineralization of reactive brilliant red X-3B by UV driven photocatalytic membrane contact ozonation. *Journal of hazardous materials*, 391, 122194.
- Zhang, S., Zhong, L., Wang, J., Tang, A., Yang, H., 2021. Porous carbon-based MgAlF₅·1.5 H₂O composites derived from carbon-coated clay presenting super high adsorption capacity for Congo Red. *Chemical Engineering Journal*, 406, 126784.